

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

202 • 408 • 4000
FACSIMILE 202 • 408 • 4400

WRITER'S DIRECT DIAL NUMBER:

(202) 408-4096

June 9, 2000

ATTORNEY DOCKET NO.: 6944.22

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

New U.S. Patent Application

Title: A METHOD FOR THE APPLICATION OF IMPLICIT
SIGNATURE SCHEMES

Inventor(s): Scott Alexander VANSTONE
Campbellville, Ontario L0P 1B0
Canada
and
Simon BLAKE-WILSON
Toronto, Ontario M6G 3G6
Canada

Sir:

We enclose the following papers for filing in the United States Patent and
Trademark Office in connection with the above patent application.

1. Application - 22 pages, including 2 independent claims and 50 claims
total.
2. Drawings - 6 sheets of informal drawings containing 6 figures.

This application is being filed under the provisions of 37 C.F.R. § 1.53(f).
Applicant(s) await(s) notification from the Patent and Trademark Office of the time set
for filing the Declaration and paying the filing fee of \$690. Please do not charge the
filing fee to our Deposit Account without our authorization.

Please accord this application a serial number and filing date.

JC497 U.S. PTO
06/09/00
09/589891

TOKYO

011•813•3431•6943

BRUSSELS

011•322•646•0353

00609076858560

JC772 U.S. PTO
06/09/00
ATLANTA
653•6400
ALO ALTO
650•849•6600

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

Assistant Commissioner for Patents


June 9, 2000

Page 2

The Commissioner is hereby authorized to charge any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: 
Ernest F. Chapman
Reg. No. 25,961

EFC/FPD/cm
Enclosures

006090-1686560

A Method for the Application of Implicit Signature Schemes

This invention relates generally to cryptographic schemes, and more specially to implicit signature schemes.

BACKGROUND OF THE INVENTION

Diffie-Hellman key agreement provided the first practical solution to the key distribution problem, in cryptographic systems. The key agreement protocol allows two parties never having met in advance or sharing key material to establish a shared secret by exchanging messages over an open (unsecured) channel. The security rests on the intractability of computing discrete logarithms or in factoring large integers.

With the advent of the Internet and such like, the requirement for large-scale distribution of public keys and public key certificates is becoming increasingly important to enable systems like Diffie-Hellman key agreement.

A number of vehicles are known by which public keys may be stored, distributed or forwarded over unsecured media without danger of undetectable manipulation. These vehicles include public-key certificates, identity-based systems, and implicit certificates. The objective of each vehicle is to make one party's public key available to others such that its authenticity and validity are verifiable.

A public-key certificate is a data structure consisting of a data part and a signature part. The data part contains cleartext data including as a minimum, a public key and a string identifying the party to be associated therewith. The signature part consists of the digital signature of a certification authority (CA) over the data part, effectively the encryption of the data with the CA's private key so it may be recovered with his public key, thereby binding the entities identity to the specified public key. The CA is a trusted third party whose signature on the certificate vouches for the authenticity of the public key bound to the subject entity.

Identity-based systems (ID-based system) resemble ordinary public-key systems, involving a private transformation and a public transformation, but parties do not have explicit public keys as before. Instead, the public key is effectively replaced by a party's publicly available identity information (e.g. name or network address). Any publicly available information, which uniquely identifies the party and can be undeniably

associated with the party, may serve as identity information. Here a trusted CA is required to furnish each party with the private key corresponding to their public key.

An alternate approach to distributing public keys involves implicitly certified public keys. Here explicit user public keys exist, but they are to be reconstructed by the recipient rather than transported by explicitly signed public-key certificates as in certificate based systems. Thus implicitly certified public keys may be used as an alternative means for distributing public keys (e.g. Diffie-Hellman keys).

With a conventional certificate, the authenticity of the information must be verified to ensure that the sender and the sender's public key are bound to one another. With an implicit certification it is simply necessary to verify the sender's signature of the message using the implicit certificate. The primary advantage of implicit certificates is the computationally expense explicit certificate verification is not required as it is in certification schemes. Further, unconditionally trusted CAs are not required as they are in ID-based schemes.

An example of an implicitly certified public key mechanism is known as Gunther's implicitly-certified public key method. In this method:

1. A trusted server T selects an appropriate fixed public prime p and generator α of Z_p^* . T selects a random integer t , with $1 \leq t \leq p-2$ and $\gcd(t, p-1) = 1$, as its private key, and publishes its public key $u = \alpha^t \bmod p$, along with α, p .
2. T assigns to each party A a unique name or identifying string I_A and a random integer k_A with $\gcd(k_A, p-1) = 1$. T then computes $P_A = \alpha^{k_A} \bmod p$. P_A is A's key reconstruction public data, allowing other parties to compute $(P_A)^a$ below.
3. Using a suitable hash function h , T solves the following equation for a :

$$H(I_A) \equiv t.P_A + k_A a \pmod{p-1}$$
4. T securely transmits to A the pair $(r,s) = (P_A, a)$, which is T's ElGamal signature on I_A . (a is A's private key for a Diffie-Hellman key-agreement)

5. Any other party can then reconstruct A's Diffie-Hellman public key P_A^a entirely from publicly available information (α, I_A, u, P_A, p) by computing:

$$P_A^a \equiv \alpha^{H(I_A)} u^{P_A} \text{ mod } p$$

Thus signing an implicit certificate needs one exponentiation operation, but reconstructing the ID-based implicitly-verifiable public key needs two exponentiations.

It is known that exponentiation in the group Z_p^* and its analog scalar multiplication of a point in $E(F_q)$ is computationally intensive. An RSA scheme is extremely slow requiring successive squaring and multiplication operations. Elliptic curve (EC) cryptosystems are not only more robust but also more efficient by using doubling and adding operations. However, despite the resounding efficiency of EC systems over RSA type systems the computational requirement is still a problem particularly for computing devices having limited computing power such as "smart cards", pagers and such like.

Significant improvements have been made in the efficacy of certification protocols by adopting the protocols set out in Canadian patent application 2,232,936. In this arrangement, an implicitly-certified public key is provided by cooperation between a certifying authority, CA, and a correspondent A.

For each correspondent A, the CA selects a unique identity I_A distinguishing the entity A. The CA generates public data γ_A for reconstruction of a public key of correspondent A by mathematically combining a private key of the trusted party CA and a generator created by the CA with a private value of the correspondent A. The values are combined in a mathematically secure way such that the pair (I_A, γ_A) serves as correspondent A's implicit certificate. The CA combines the implicit certificate information (I_A, γ_A) in accordance with a mathematical function $F(\gamma_A, I_A)$ to derive an entity information f . A private key a of the correspondent A is generated from f and the private value of the correspondent A. The correspondent A's public key may be reconstructed from the public information, the generator γ_A and the identity I_A relatively efficiently.

present invention to provide a technique that obviates or mitigates the above disadvantages.

SUMMARY OF THE INVENTION

In accordance with an embodiment of the present invention there is provided a method of verifying a transaction over a data communication system between a first and second correspondent through the use of a certifying authority. The certifying authority has control of a certificate's validity, which is used by at least the first correspondent. The method comprises the following steps. One of the first and second correspondents advising the certifying authority that the certificate is to be validated. The certifying authority verifies the validity of the certificate attributed to the first correspondent. The certifying authority generates implicit signature components including specific authorization information. At least one of the implicit signature components is forwarded to the first correspondent for permitting the first correspondent to generate an ephemeral private key. At least one of the implicit signature components is forwarded to the second correspondent for permitting recovery of an ephemeral public key corresponding to the ephemeral private key. The first correspondent signs a message with the ephemeral private key and forwards the message to the second correspondent. The second correspondent attempts to verify the signature using the ephemeral public key and proceeds with the transaction upon verification.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings in which

Figure 1 is a schematic representation of a data communication system;

Figure 2 is a flow chart illustrating the exchange of information conducted on the system of figure 1 in a first embodiment;

Figure 3 is a flow chart illustrating the exchange of information conducted on the system of figure 1 in a second embodiment;

Figure 4 is a flow chart showing a third embodiment of the system of Figure 1;

Figure 5 is a flow chart showing a fourth embodiment of the system of Figure 1;

Figure 6 is a flow chart showing a fifth embodiment of the system of Figure 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring therefore to figure 1, a data communication system 10 includes a pair of correspondents A,B, respectively identified as 12, 14, interconnected by a communication link 16. The correspondent B, 14, is also connected by a communication link 18 to a certifying authority, CA, indicated at 20. It will be appreciated that the links 16, 18 are typically telephone lines or wireless links allowing the parties to route messages to intended recipients.

Each of the correspondents, 12, 14 and certifying authority 20 incorporate cryptographic units 22 that perform public-key cryptographic functions under the control of cryptographic software that may be embodied on a data carrier or programmed in an integrated circuit. Such implementations are well known and need not be described in detail, except to the extent necessary to appreciate the operation of the exchange of messages. For the purpose of this description it is assumed that each of the units 22 implement an elliptic curve public-key cryptosystem (ECC) operating in a field defined over $F(q)$ but it will be appreciated that other implementations, such as those using $Z_p^* \cdot F_p^*$, the multiplicative group of integers modulo a prime may be used.

The parameters for the ECC are an underlying cubic curve and a defined point P on the curve. The correspondent A has an identity, ID_A , a short term or ephemeral private key k and a corresponding public key kP . The CA 20 is advised of the public key kP and identity ID_A which conveniently remain the same for all correspondence originating from the correspondent A.

To initiate an exchange of a message, m , for example a transaction record, between correspondents A and B, the message is sent by correspondent A to correspondent B over the communication channel 16. The message m is sent in the clear or in any other manner that may be read by correspondent B.

The correspondent B advises the certifying authority CA 20 that he has received a message from correspondent A and may also include some additional information relating to the nature of the transaction. This may be performed on a dedicated channel or may be encrypted if the information is considered to be of a sensitive nature. Upon

receiving the information from correspondent B, the CA 20 checks the record of correspondent A and, if in order, prepares to return to the correspondent B the implicit certificate components, 24, identified as s_i, γ_i and A_i .

The component A_i includes the identity of A, i.e. ID_A , typically a unique distinguishing name or identity, for example a name, address or phone number that is stored by the CA 20 and a time stamp, message or similar transaction specific information.

The CA 20 also generates a random integer r and computes a corresponding public key rP . The value of γ_i is then computed from the relationship that $\gamma_i = kP + rP$.

The value of s_i is then computed from the relationship that $s_i = r - c \cdot H(A_i, \gamma_i)$ where c is a long term secret key of the CA 20, and H indicates a secure hash function such as SHA 1.

The CA 20 forwards s_i, γ_i , and A_i to correspondent B. Since A_i contains transaction specific information, the implicit signature components are also transaction specific. It is preferable, but not necessary, that the CA signs the signature components forwarded to correspondent B.

Correspondent B, upon receipt of the communication from the CA 20, forwards the certificate component s_i to the correspondent A. It is preferable, but not necessary, that correspondent B signs the certificate component sent to correspondent A. The correspondent A computes a transaction specific private key a_i from the relationship $a_i = k + s_i$. The message m is then signed with the computed private key a_i and returned to the correspondent B.

The correspondent B then recovers the value corresponding to the transaction specific public key, a_iP , from the values of γ_i and A_i received from the CA 20. The public key a_iP can be computed from $a_iP = \gamma_i - H(A_i, \gamma_i) \cdot cP$, where cP is the public key of the CA 20, and checks the signature on the message m . If it verifies then the message is accepted and the transaction completed.

The implementation described above maintains a relatively small size of certificate and reduces the work performed by the correspondents A and B. The CA 20 is required to perform one implicit signature per transaction and correspondent B only requires one implicit signature verification and two signature verifications per

transaction. Whereas prior proposals would require the CA 20 to return a message to the correspondent B stating that correspondent A has a valid certificate, this is avoided in the present embodiment by sending transaction specific implicit certificate components.

As described above, a common key kP is used for each transaction by correspondent A but if preferred a different key kP may be used to inhibit tracing of transactions originating at correspondent A. In this case new values of kP are sent to the CA 20 offline with appropriate levels of security.

An alternative arrangement is shown in figure 3, wherein like numerals with a prefix "1" refer to similar components as those of Figure 1, in which the originator of the message, correspondent A, communicates directly with the CA 120 who has previously been provided with the identity ID_A and the public key kP . In this arrangement the correspondent A notifies the CA 120 that a certificate is required. The CA 120 generates a certificate with components s_i , γ_i , A_i as before. The correspondent A then computes the transaction specific private key $a_i = k + s_i$ and uses it to sign the message m . The signed message is forwarded together with the explicit signature components γ_i and A_i to the correspondent B.

The correspondent B recovers the public key a_iP from A_i and γ_i and checks the signature on the message m . The transaction specific information in the component A_i is checked to determine if it is as expected. Verification of the transaction specific information after it has been recovered is known in the art and depends on the type of information being verified. If both the signature and the information are verified then the transaction is accepted.

Alternately, the CA 120 could send s_i to correspondent A and γ_i , A_i to correspondent B. Correspondent A can then sign message m using the private key $d_i = a + s_i$ and forward the message and signature to correspondent B.

The above protocol may also be used to provide implicit attributable certificates as shown in figure 4, wherein like numerals with a prefix "2" refer to similar components as those of Figure 1. Initially the values of ID_A and kP are transferred to the CA 220 from correspondent A. A request is then sent from correspondent A to the CA 220 to gain access to a particular application controlled by B.

The CA 220 generates a certificate including A_i , γ_i and s_i with A_i including the ID_A and an indication that the correspondent A can use a particular application and sends the certificate to A. A value of $a_i = k + s_i$ is generated by the correspondent A and used to sign the message m . The signed message is forwarded to correspondent B together with γ_i and A_i who recovers the corresponding public key a_iP . The signature is then checked and, if it verifies, access is given to the application. If the signature does not verify, the request is returned.

The above implicit attributable certificate is efficient in that it only requires one signed certificate and by using different public keys per application is hard to trace to a particular user. Moreover, the identity and the specific attributable certificate can be incorporated into one certificate rather than the two normally required.

Yet an alternate embodiment, similar to that illustrated in figure 3, is shown in figure 5. The CA 120 has a private key, c , and a public key, $Q_C = cP$. In order to acquire a certificate, correspondent A first generates a random integer, a . Integer a is used to compute a value aP , which is sent to the CA 120 along with correspondent A's identity, ID_A or, alternately, A_i (which may contain ID_A).

Upon receiving aP and ID_A from correspondent A, the CA 120 generates a random integer c_A and uses it to calculate correspondent A's certificate, $\gamma_A = aP + c_AP$. The CA 120 also calculates $s_A = h(\gamma_A \parallel ID_A \parallel cP)c + c_A \pmod{n}$. The certificate, γ_A and s_A are sent to correspondent A. Correspondent A's private key then becomes $d = a + s_A$, and its public key becomes $Q_A = dP$. Correspondent A's public key can be derived from the certificate according to the equation $Q_A = h(\gamma_A \parallel ID_A \parallel cP)Q_C + \gamma_A$.

Therefore, if correspondent A wants to sign a message, m , to send to correspondent B, correspondent A does so using the private key, d . Correspondent A then sends the signed message along with the certificate, γ_A , and identification, ID_A . Upon receiving the information sent from correspondent A, correspondent B uses the certificate and identification along with the CA's public key, Q_C , for deriving correspondent A's public key, Q_A . The message is accepted if the signature is verified using correspondent A's derived public key, Q_A .

In the present embodiment, it is possible for the CA to efficiently recertify correspondent A. The CA generates a random number, \overline{c}_A and computes $\overline{c}_A P$. Using the original value of aP received from correspondent A, the CA generates a new certificate, $\overline{\gamma}_A = \overline{c}_A P + aP$ and a new $\overline{s}_A = h(\overline{\gamma}_A \parallel ID_A \parallel cP)c + \overline{c}_A \pmod{n}$. The certificate, $\overline{\gamma}_A$, and \overline{s}_A are sent to correspondent A. Therefore, correspondent A has a new private key, $\overline{d} = a + \overline{s}_A$, and a new certificate, $\overline{\gamma}_A$. Therefore, correspondent A's new public key, \overline{Q}_A , can be derived according to $\overline{Q}_A = h(\overline{\gamma}_A \parallel ID_A \parallel cP)Q_C + \overline{\gamma}_A$.

Using such a recertification process can recertify correspondent A without requiring correspondent A to change its private key. However, this scheme requires sufficient bandwidth to send both s_A and γ_A to correspondent A. Furthermore, for each correspondent (such as correspondent A), the CA has to perform a point multiplication to obtain the new certificate, γ_A .

However, it is possible to make a modification to the recertification process as described above such that it is more efficient and requires less bandwidth. In the following example illustrated in figure 6, the CA recertifies all correspondents (including correspondent A). Also, it is assumed that correspondent A has been previously certified, acquired the certificate, γ_A , from the CA and determined the private key $d = a + s_A$.

The CA certifies the correspondents at the expiration of a certification period. For an i^{th} certification period, the CA generates a random value k_i and computes the value $Q_i = k_i P$. For each correspondent such as correspondent A, the CA computes $r_i = h(\gamma_A \parallel ID_A \parallel cP \parallel k_i P \parallel i)$ and then $s_{A_i} = r_i c + k_i + c_A \pmod{n}$. Since the certificate does not change, it is only necessary for the CA to send s_{A_i} to correspondent A. The private key for correspondent A becomes $d_i = a + s_{A_i}$ and the certificate remains γ_A . The CA makes Q_i and i publicly available.

Therefore, it is possible to reconstruct correspondent A's public key, $d_i P$, by computing r_i , and then calculating $d_i P = r_i Q_C + \gamma_A + Q_i$. Correspondent A communicates with correspondent B similarly to the situation previously described. If correspondent A wants to sign a message to send to correspondent B, correspondent A

does so using the private key, d_i . Correspondent A then sends the signed message along with the certificate, γ_A , and identification ID_A . Upon receiving the information sent from correspondent A, correspondent B uses the certificate and identification along with the CA's public keys, Q_C and Q_i , for deriving r_i . The values r_i , Q_C , Q_i , and γ_A are then used for deriving correspondent A's public key. The message is accepted if the signature is verified using correspondent A's derived public key.

Thus it can be seen that correspondent A's certificate does not change. Therefore, the CA is only required to send s_i and i to correspondent A for recertification, which requires essentially half the bandwidth of sending s_A and γ_A as in the previous example. Further, although the CA has to calculate $Q_i = k_i P$ for the i th certification period, the calculation is amortized over all the correspondents. That is, the CA only has to do one point multiplication for all the correspondents (for the calculation of Q_i). The CA also has to perform one modular multiplication for each correspondent (while calculating s_A). This results in a more efficient process than previously described wherein the CA has to perform one point multiplication and one modular multiplication for each correspondent.

Since the recertification scheme described above is not a costly operation for the CA, the CA could recertify correspondents more frequently than if traditional schemes are implemented. Therefore, one application of this recertification scheme is to replace revocation lists. Instead of providing a list of revoked certificates, the CA recertifies only those certificates that are still valid and have not been revoked.

In an alternate embodiment, the certificates as described in the previous embodiments are embedded into an RSA modulus itself. For an RSA encryption algorithm, correspondent A is required to provide a public key pair, (n, e) , where n is the modulus and e is the public exponent. The modulus is defined as $n = pq$ where p and q are large prime numbers. The public exponent is selected as $1 < e < \phi$, where $\phi = (p-1)(q-1)$. It has been shown that a portion of the modulus can be set aside to have a predetermined value without increasing the vulnerability of the key. This method is described in detail in U.S. serial no. 08/449,357 filed May 24, 1995, which is hereby incorporated by reference.

Embedding the certificate into the modulus reduces the bandwidth requirements since the certificate is included as part of the modulus instead of in addition to it. This implementation is particularly useful for a CA who signs using RSA and certifies using ECC. For example, a 2048-bit RSA modulus can easily contain a 160-bit ECC certificate.

Although the invention has been described with reference to certain specific embodiments, various modifications thereof will be apparent to those skilled in the art without departing from the spirit and scope of the invention as outlined in the claims appended hereto.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A method of verifying a transaction over a data communication system between a first and second correspondent through the use of a certifying authority having control of a certificate's validity, said certificate being used by at least said first correspondent, said method comprising the steps of:
 - a) one of said first and second correspondents advising said certifying authority that said certificate is to be validated;
 - b) said certifying authority verifying the validity of said certificate attributed to said first correspondent;
 - c) said certifying authority generating implicit signature components including specific authorization information;
 - d) forwarding to said first correspondent at least one of said implicit signature components for permitting said first correspondent to generate an ephemeral private key;
 - e) forwarding to said second correspondent at least one of said implicit signature components for permitting recovery of an ephemeral public key corresponding to said ephemeral private key;
 - f) said first correspondent signing a message with said ephemeral private key and forwarding said message to said second correspondent and
 - g) said second correspondent attempting to verify said signature using said ephemeral public key and proceeding with said transaction upon verification.
2. A method as defined in claim 1, wherein said second correspondent advises said certification authority that said certificate is to be validated upon receiving an initial message from said first correspondent.
3. A method as defined in claim 2, wherein said at least one of said implicit signature components is forwarded to said second correspondent by said certifying authority.

4. A method as defined in claim 3, wherein said at least one of said implicit signature components is forwarded to said first correspondent by said second correspondent.
5. A method as defined in claim 4, wherein said generated implicit signature components includes:
 - a) γ_i , where $\gamma_i = kP + rP$, and where k is a long term private key of said first correspondent, r is a random integer generated by said certification authority, and P is a point on a curve; and
 - b) s_i , where $s_i = r - c \cdot H(A_i, \gamma_i)$, and where c is a long term private key of said certifying authority, A_i includes at least one distinguishing feature of said first correspondent and said specific authorization information, and H indicates a secure hash function;
 wherein said long term private key of said first correspondent is sent to said certifying authority prior to said verification transaction.
6. A method as defined in claim 5, wherein A_i , γ_i , and s_i are forwarded to said second correspondent and s_i is forwarded to said first correspondent.
7. A method as defined in claim 5, wherein said distinguishing feature is includes at least one of a name of said first correspondent, a telephone number of said first correspondent, and an address of said first correspondent.
8. A method as defined in claim 5, wherein said specific authorization information includes at least one of a time of said transaction and a date of said transaction.
9. A method as defined in claim 6, wherein said ephemeral private key is generated according to $a_i = k + s_i$, where a_i is said ephemeral private key.

10. A method as defined in claim 9, wherein said ephemeral public key is recovered according to $a_iP = \gamma_i - H(A_i, \gamma_i) \cdot cP$, where a_iP is said ephemeral public key and cP is said certifying authority's public key.
11. A method as defined in claim 10, wherein said certifying authority verifies the validity of said certificate attributed to said first correspondent by checking a list for determining if said certificate has been revoked.
12. A method as defined in claim 10, wherein said ephemeral private key is a transaction specific private key and said ephemeral public key is a transaction specific public key.
13. A method as defined in claim 2, wherein said first correspondent advises said certification authority that said certificate is to be validated.
14. A method as defined in claim 14, wherein said at least one of said implicit signature components is forwarded to said first correspondent by said certifying authority.
15. A method as defined in claim 14, wherein said at least one of said implicit signature components is forwarded to said second correspondent by said first correspondent.
16. A method as defined in claim 15, wherein said generated implicit signature components include:
 - a) γ_i , where $\gamma_i = kP + rP$, and where k is a long term private key of said first correspondent, r is a random integer generated by said certification authority, and P is a point on a curve; and
 - b) s_i , where $s_i = r - c \cdot H(A_i, \gamma_i)$, and where c is a long term private key of said certifying authority, A_i includes at least one distinguishing feature of said

first correspondent and said specific authorization information, and H indicates a secure hash function;

wherein said long term private key of said first correspondent is sent to said certifying authority prior to said verification transaction.

17. A method as defined in claim 16, wherein A_i , γ_i , and s_i are forwarded to said first correspondent, and A_i and γ_i are forwarded to said second correspondent.
18. A method as defined in claim 16, wherein said distinguishing feature includes at least one of a name of said first correspondent, a telephone number of said first correspondent, and an address of said first correspondent.
19. A method as defined in claim 16, wherein said specific authorization information includes at least one of a time of said transaction and a date of said transaction.
20. A method as defined in claim 17, wherein said ephemeral private key is generated according to $a_i = k + s_i$, where a_i is said ephemeral private key.
21. A method as defined in claim 20, wherein said ephemeral public key is recovered according to $a_iP = \gamma_i \cdot H(A_i, \gamma_i) \cdot cP$, where a_iP is said ephemeral public key and cP is said certifying authority's public key.
22. A method as defined in claim 21, wherein said certifying authority verifies the validity of said certificate attributed to said first correspondent by checking a list for determining if said certificate has been revoked.
23. A method as defined in claim 21, wherein said ephemeral private key is a transaction specific private key and said ephemeral public key is a transaction specific public key.

24. A method as defined in claim 15, wherein said generated implicit signature components include a parameter for indicating a predetermined permission for said first correspondent, said second correspondent granting access to said first correspondent according to said predetermined permission upon verification of said signature.
25. A method as defined in claim 15, wherein said generated implicit signature components include:
- γ_A , where $\gamma_A = aP + c_A P$, and where aP is a long term public key of said first correspondent, c_A is a random integer generated by said certifying authority, and P is a point on a curve; and
 - s_A , where $s_A = h(\gamma_A \parallel A_i \parallel cP)c + c_A \pmod{n}$, and where A_i includes at least one distinguishing feature of said first correspondent, where c is a long term private key of said certifying authority, n is a large prime number, and h indicates a secure hash function.
26. A method as defined in claim 23, wherein γ_A and s_A are forwarded to said first correspondent, and A_i and γ_A are forwarded to said second correspondent by said first correspondent.
27. A method as defined in claim 25, wherein said distinguishing feature is includes at least one of a name of said first correspondent, a telephone number of said first correspondent, and an address of said first correspondent.
28. A method as defined in claim 25, wherein said specific authorization information includes at least one of a time of said transaction and a date of said transaction.
29. A method as defined in claim 26, wherein said ephemeral private key is generated according to $d = a + s_A$, where d is said ephemeral private key.

30. A method as defined in claim 29, wherein said ephemeral public key is recovered according to $Q_A = h(\gamma_A \parallel A_i \parallel Q_C)Q_C + \gamma_A$, where Q_A is said ephemeral public key and Q_C is said certifying authority's long term public key.
31. A method as defined in claim 30, wherein said certifying authority recertifies said certificate attributed to said first correspondent by changing said random integer, c_A .
32. A method as defined in claim 30, wherein said ephemeral private key is a transaction specific private key and said ephemeral public key is a transaction specific public key.
33. A method as defined in claim 15, wherein said generated implicit signature components include:
- i , where i is a certification period;
 - s_A , where $s_A = r_i c + k_i + c_A \pmod{n}$, n is a large prime number, c is a long term private key of said certifying authority, c_A and k_i are random integers, and $r_i = h(\gamma_A \parallel A_i \parallel cP \parallel k_i P \parallel i)$, where A_i includes at least one distinguishing feature of said correspondent and said specific authorization information, P is a point on a curve, and h indicates a secure hash function;
- wherein $\gamma_A = aP + c_A P$, and where aP is a long term public key of said correspondent and γ_A has previously been determined by said certifying authority and forwarded to said correspondent.
34. A method as defined in claim 33, wherein i and s_A are forwarded to said first correspondent, and A_i and γ_A are forwarded to said second correspondent by said first correspondent.

35. A method as defined in claim 33, wherein said distinguishing feature is includes at least one of a name of said first correspondent, a telephone number of said first correspondent, and an address of said first correspondent.
36. A method as defined in claim 33, wherein said specific authorization information includes at least one of a time of said transaction and a date of said transaction.
37. A method as defined in claim 34, wherein said ephemeral private key is generated according to $d_i = a + s_A$, where d_i is said ephemeral private key.
38. A method as defined in claim 37, wherein said ephemeral public key is recovered according to $Q_A = r_i Q_C + \gamma_A + Q_i$, where Q_A is said ephemeral public key, Q_i is said certifying authority's certification period public key, and Q_C is said certifying authority's long term public key.
39. A method as defined in claim 38, wherein said certifying authority recertifies said certificate attributed to said first correspondent for each certification period, i , by changing said random integer, k_i .
40. A method as defined in claim 38, wherein said ephemeral private key and said ephemeral public key have a predetermined period of validity.
41. A method as defined in claim 40, wherein said predetermined period of validity is one transaction.
42. A method as defined in claim 40, wherein said predetermined period of validity is a predetermined number of transactions.
43. A method as defined in claim 40, wherein said predetermined period of validity is a predetermined time period.

44. A method for certifying a correspondent through the use of a certifying authority having control of a certificate's validity, said method comprising the steps of:
- a) said certifying authority generating a first random number have a value;
 - b) generating implicit signature components based on said first random number;
 - c) publishing a public key of said certifying authority for use in verifying said correspondent;
 - d) forwarding said implicit signature components from said certifying authority to said correspondent;
- wherein said certifying authority recertifies said correspondent's certificate by changing said value of said first random number.

45. A method as defined in claim 44, wherein c_A is said first random number generated by said certifying authority and said implicit signature components include:
- a) γ_A , where $\gamma_A = aP + c_AP$, and where aP is a long term public key of said correspondent and P is a point on a curve; and
 - b) s_A , where $s_A = h(\gamma_A \parallel A_i \parallel cP)c + c_A \pmod{n}$, and where c is a long term private key of said certifying authority, n is a large prime number, A_i is an identifier of said correspondent and includes at least one distinguishing feature of said correspondent, and h indicates a secure hash function;


46. A method as defined in claim 45, wherein said correspondent is recertified by forwarding said implicit signature components for said first random number having said changed value from said certifying authority to said correspondent.

47. A method as defined in claim 43, wherein said first random integer has said value for one certification period, said value being changed for other of said certifications periods.

48. A method as defined in claim 47, wherein k_i is said first random integer generated by said certifying authority for an i th certification period and said implicit signature components include:
- c) i , where i is a current certification period;
 - d) s_A , where $s_A = r_i c + k_i + c_A \pmod{n}$, n is a large prime number, c is a long term private key of said certifying authority, c_A is a second random integer, and $r_i = h(\gamma_A \parallel A_i \parallel cP \parallel k_i P \parallel i)$, where A_i includes at least one distinguishing feature of said correspondent, P is a point on a curve, and h indicates a secure hash function;
- wherein $\gamma_A = aP + c_A P$, and where aP is a long term public key of said correspondent and γ_A has previously been determined by said certifying authority and forwarded to said correspondent.
49. A method as defined in claim 48, wherein said published information further includes $k_i P$ and i .
50. A method as defined in claim 49, wherein said correspondent is recertified by forwarding said implicit signature components for said first random number having said changed value from said certifying authority to said correspondent.

ABSTRACT

A method of verifying a transaction over a data communication system between a first and second correspondent through the use of a certifying authority. The certifying authority has control of a certificate's validity, which is used by at least the first correspondent. The method comprises the following steps. One of the first and second correspondents advising the certifying authority that the certificate is to be validated. The certifying authority verifies the validity of the certificate attributed to the first correspondent. The certifying authority generates implicit signature components including specific authorization information. At least one of the implicit signature components is forwarded to the first correspondent for permitting the first correspondent to generate an ephemeral private key. At least one of the implicit signature components is forwarded to the second correspondent for permitting recovery of an ephemeral public key corresponding to the ephemeral private key. The first correspondent signs a message with the ephemeral private key and forwards the message to the second correspondent. The second correspondent attempts to verify the signature using the ephemeral public key and proceeds with the transaction upon verification.

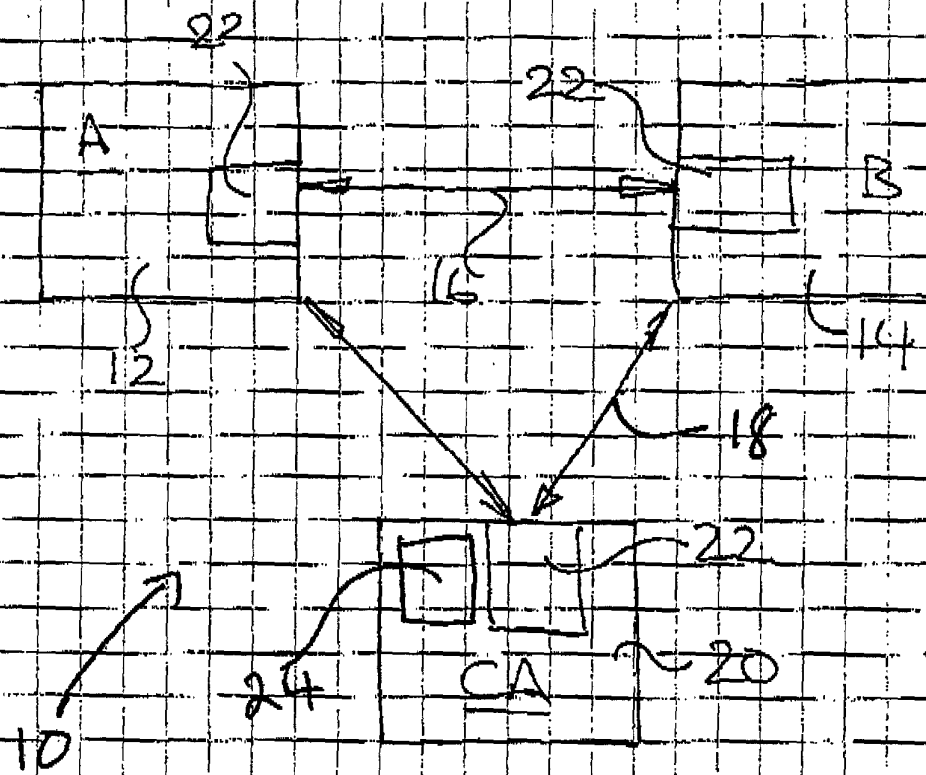FIG. 1

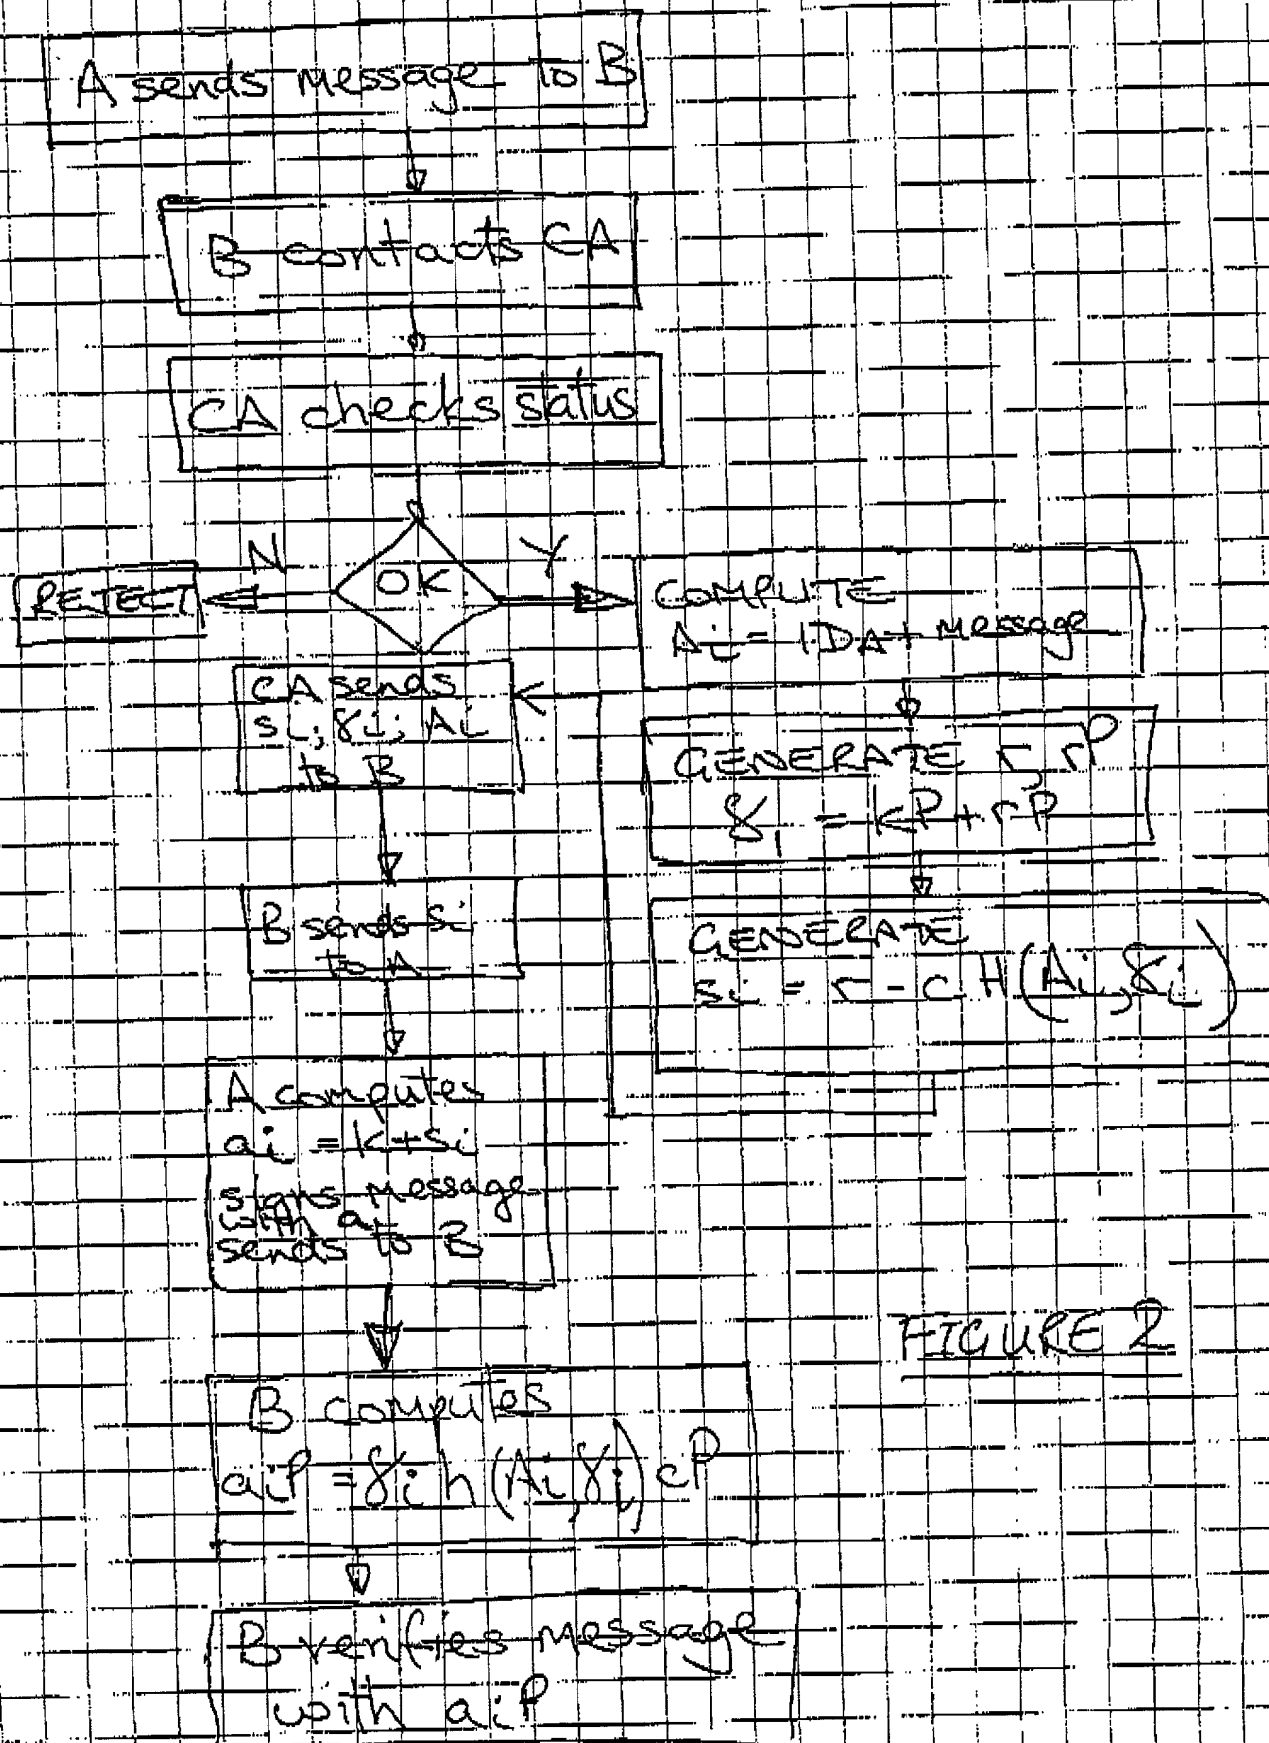


FIGURE 2

A sends IDA and k_P
to CA

A requests certificate
from CA

CA computes s_i, γ_i, A_i
and sends to A

A signs message M
with $a_i = k + s_i$

A sends signed M, γ_i
and A_i to B

B computes a_i^P
using A_i, γ_i

B verifies message
with a_i^P

FIGURE 3

A sends ID_A and EP to CA

A requests certificate from CA

CA uses ID_A and a permission level to determine A_i

CA generates S, S_i base on A_i and send all 3 to A

A signs message, m, with
 $a_i = k + S_i$

A sends signed m, S_i and A_i to B

B computes a_iP using A_i, S_i

B verifies message with a_iP

B grants A access to an application

FIGURE 4

A generates random integer a

A transmits aP and Ac to the CA

CA generates S_A and s_A and transmits them to A

A generates private key $d = a + s_A$
public key $Q_A = dP$

FIGURE
5

A signs message with d

A sends signed message S_A and Ac to B

B derives Q_A using S_A, Ac and CA's public key Q_c

B verifies A using Q_A

A acquires S_A , S_A from CA
computes $d = a + S_A$



certification period = i



CA calculates S_{A_i} and Q_i



CA transmits S_{A_i} to A
publishes Q_i and i

A signs message with
 $d = a + S_{A_i}$

FIGURE 6

A sends signed message, S_A ,
and A_i to B

B uses S_i , A_i , i , Q_i and CA's
public key Q_C to determine
A's public key Q_A

B verifies A using Q_A

certification period = $i+1$